USER MANUAL · TREASURY MODULE

Bank limits and source of funds

How much bank money Capitra can use today, on what conditions, and which money pays each disbursement. Written for Treasury, Finance and Credit staff, and the checkers who verify their work.

Version 1.8 **Date** 7 November 2026

Covers Step 1 Bank Limits · Bank rules · Step 2 Treasury Disburse · Payment and GL



0 Quick start

The four jobs you will do most often. Each one links to the full explanation.

ONCE PER FACILITY

Set up a bank's limits

1. Home → Treasury → Bank Limits
2. **New Facility**: limit, currency, dates
3. **+ Tranche** for what the bank released
4. **+ Sublimit**, tick its business lines

FROM THE TERM SHEET

Add a bank rule

1. Select the facility → **+ Rule**
2. Choose the rule, what it is on, and the limit
3. Read the sentence at the top: it says what the rule will do
4. Ask a checker to **Verify**

WHEN THE BANK RELEASES MONEY

Release a tranche

1. Select the Draft tranche → **Edit**
2. Status **Active**
3. Enter the release date
4. Save: Available goes up at once

EVERY DISBURSEMENT

Choose the source of funds

1. Open the task from the inbox
2. **Suggest**, or type amounts
3. Fix any red badge
4. **Execute**, then **Complete**

1 About this manual

Treasury tells you how much bank money Capitra can use today, on what conditions, and which money pays each disbursement. The module has two screens:

STEP	SCREEN	WHAT YOU DO THERE
1	**Bank Limits**	Record each bank's facilities, the tranches the bank released, the sublimits for each business line, and the bank's rules. See live usage.
2	**Treasury Disburse**	At the last step of a disbursement, choose the source of funds: own funds, one bank sublimit, or a split across several.

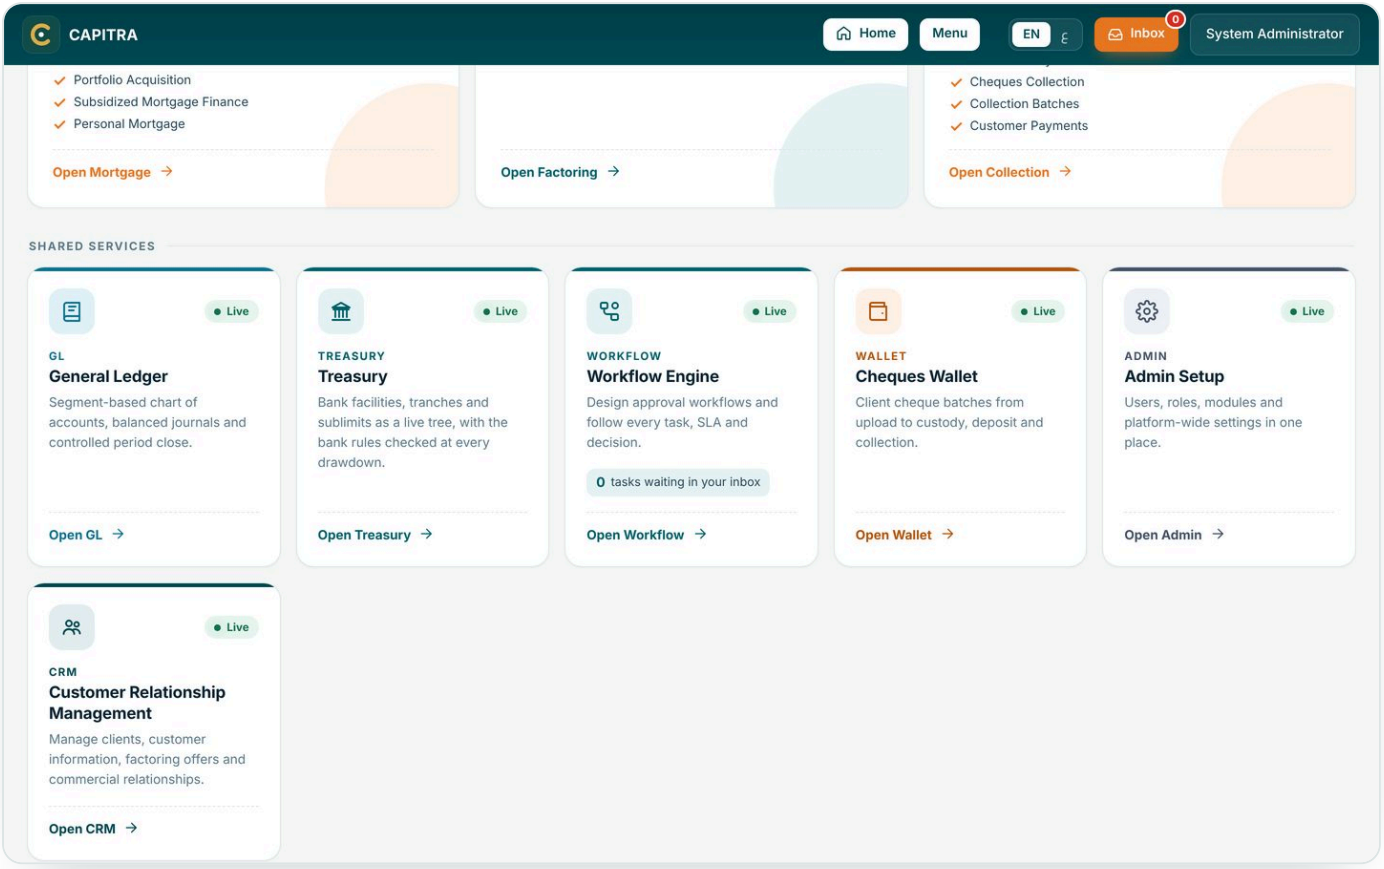


Figure 1. Open Treasury from Home (the card after General Ledger) or from Menu → Treasury.

> **EXAMPLE** One running example, **Bank A**, is used throughout, so every number links to the next.

2 Key concepts

Bank money is organized as a tree with four levels. Money can be drawn only from the lowest level, the sublimit, and only up to what is free at every level above it.



LEVEL	WHAT IT IS	BANK A EXAMPLE
Bank	A bank that lends to us.	Bank A
Facility	The agreement the bank signed with us: the approved limit, the rate and the dates.	A-RCF-2026, limit **100M**, revolving, ends 31 Dec 2028
Tranche	The part of the facility the bank has actually released. A tranche not released yet is **Draft** and cannot be drawn.	Tranche 1 = **60M** Active · Tranche 2 = **40M** Draft
Sublimit	A slice of a tranche that may fund only certain business lines (its **scope**). No line ticked means all lines.	Factoring **40M** · Leasing **20M**

Three amounts on every level

- **Outstanding** (teal): drawn and not yet repaid.
- **Reserved** (orange): held for a disbursement that is approved but not yet paid.

- **Available**: the smallest of (limit – outstanding – reserved) on this level and on every level above it.

Bank A today, worked through

LEVEL	LIMIT	OUTSTANDING	RESERVED	FREE ON THIS LEVEL	AVAILABLE TO DRAW
Factoring sublimit	40M	28M	4M	8M	**8M**
Leasing sublimit	20M	4M	0	16M	**16M**
Tranche 1	60M	32M	4M	24M	**24M**
Tranche 2 (Draft)	40M	0	0	40M	**0** not released
Facility	**100M**	**32M**	**4M**	**64M**	**24M**

WHY 24M The facility has 64M unused, but only **24M** can be drawn, because 40M sits in Tranche 2, which the bank has not released. When it is released, change Tranche 2 to **Active** and the 40M becomes available.

Dedicated pool

Its own money. The dedicated sublimits of a tranche cannot add up to more than the tranche: 40M + 20M = 60M = Tranche 1.

Shared cap

No money of its own. It only caps how much its business lines may take from the tranche, for example "Leasing may use at most 15M of Tranche 1".

Revolving means a repaid amount can be drawn again. In a non-revolving facility, a repayment does not free the limit.

3 Bank rules

A bank rule is a condition from the bank's term sheet on how its money may be used. Capitra checks every active rule each time money is drawn from that bank. A rule covers all of the bank's facilities, or one facility.

RULE	MEANING	BANK A EXAMPLE
Maximum share (concentration)	One debtor, seller, debtor group, business line, product or client segment may not take more than a percent or an amount of the bank's money.	Any debtor at most **15%** of the funded pool, warn at **12%**
Exclude	A named debtor, seller, debtor group, business line, product or client segment may not be financed with this bank's money.	Debtor group *Government entities*
Maximum invoice tenor	The invoice may not be longer than a number of days.	At most **120 days**

What a rule can be on

RULE ON	TAKEN FROM THE DISBURSEMENT	EXAMPLE FROM A TERM SHEET
Debtor, **Seller**, **Debtor group**	The invoices' debtors and the client	Any debtor at most 15%
Business line	The agreement: Factoring or Reverse Factoring	On one facility: Leasing at most **70%**, Factoring at most **30%** of the facility limit (two rules)
Product	The disbursement's product	The bank does not fund product *Reverse Factoring*
Client segment	The client's segment: SME, Corporate, Large corporate	The bank does not fund *Corporate* clients

For a business line, product or client segment the whole disbursement counts, because the whole disbursement is one business line, one product and one client. Activity (industry) and asset rules will follow when those lists are added to Capitra.

Percent of what?

Funded pool

What we have actually drawn from this bank (outstanding + reserved). We drew 200M from Bank A, so 15% = **30M** per debtor.

Facility limit

The approved limit, used or not. On a 100M facility, 15% = **15M** per debtor.

Take the basis from the term sheet's wording.

What happens on a breach

SETTING	EFFECT
Block	This bank's money cannot be used. Choose another source.
Needs override	Allowed only if a second user approves an exception.
Warn	Allowed, with a visible warning.
Warn at %	An early warning before the limit, for example at 12% when the limit is 15%.

FOUR EYES A new or changed rule is **Waiting for verification** and is not checked until a second user verifies it. The person who made the change cannot verify it. To end a rule, use **Stop** and give the reason. Stopped rules stay in history.

MODULE SETTINGS Administration → Module Settings → Treasury decides two of these controls: **Bank rule needs a maker and a checker** (No lets the person who saved a rule verify it) and **Override needs a second user** (No lets the person who chose the sources approve the override). Both are Yes unless an administrator changes them, and changing them needs a second administrator's approval.

HIGHEST NOW Under each concentration rule the screen shows who is closest to the limit today, for example "Highest now: LG Electronics 11.4%". within above warning breach

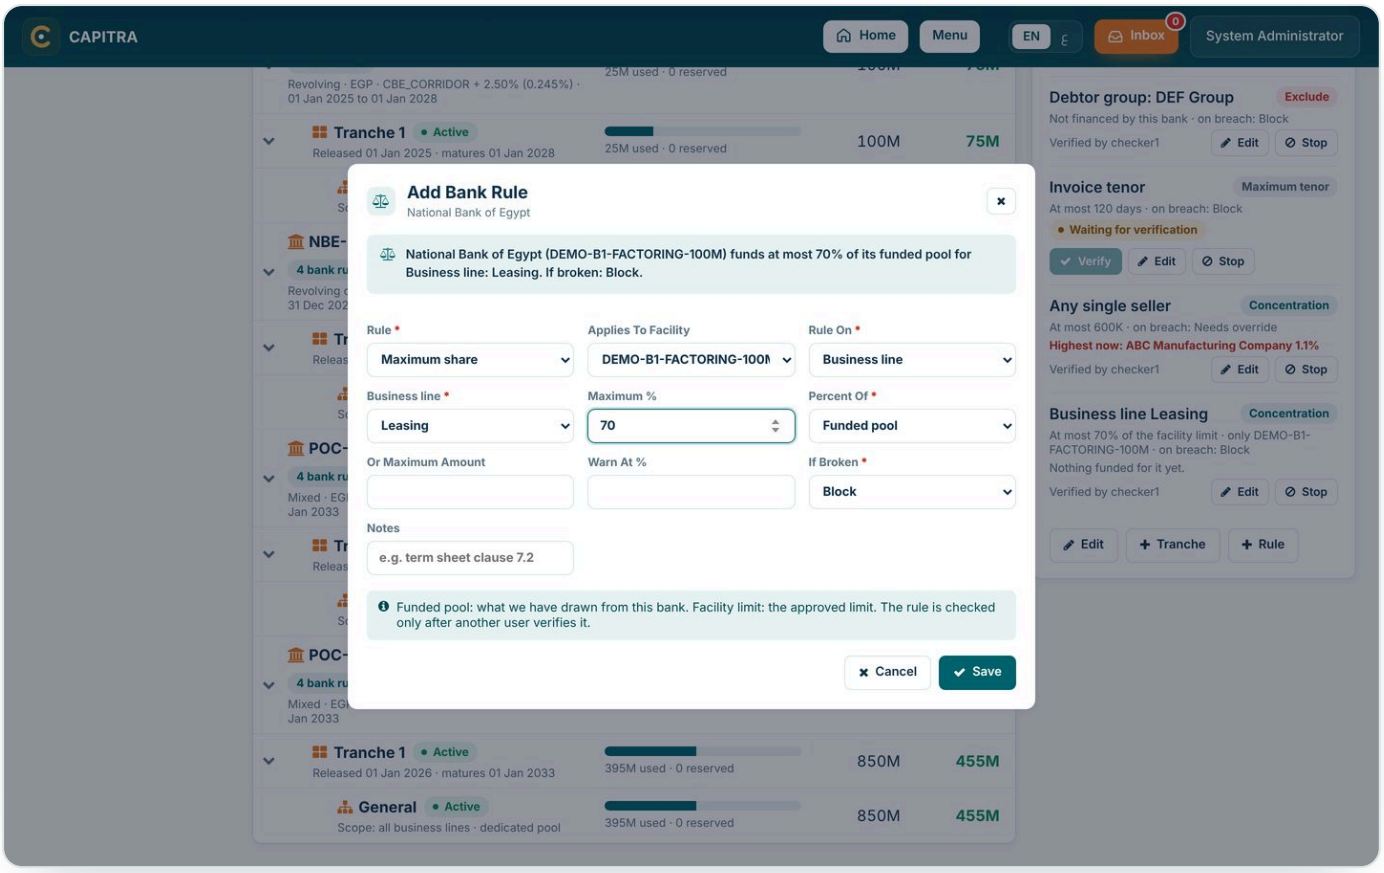


Figure 2. Add Bank Rule shows only the fields the rule needs. The line at the top says what the rule will do, here "funds at most 70% of its funded pool for Business line: Leasing. If broken: Block."

4 Debtor and supplier concentration

There are two different concentration limits, and they answer two different questions.

	OUR OWN CONCENTRATION	BANK CONCENTRATION
Question	Should we finance this invoice at all?	Whose money can pay for it?
Set by	Our credit policy, in each factoring agreement	The bank, in its term sheet (section 3)
Measured on	The customer's factoring agreement	The money we drew from that bank
Checked at	Invoice upload (warning) and approval (block)	Treasury Disburse (step 2)
If it fails	The invoice stops, unless management approves an exception	Use another bank or own funds

Every invoice passes three gates in order.

OURS · GATE 1

Agreement limit

The client's total stays within its factoring agreement.

OURS · GATE 2

Debtor or supplier share

No single debtor (or supplier) takes too much of that agreement.

BANK · GATE 3

Bank rule

The bank whose money we use allows this debtor and invoice.

— Classic factoring example

Our client **ABC** sells us its invoices. Many debtors owe ABC. ABC's agreement: limit **100M**, no debtor above **25%** (= 25M). The debtor LG already uses **20M**. A new LG invoice of **4M** arrives.

Gate 1	ABC uses 50M. 50M + 4M = 54M, below 100M.	Pass
Gate 2	LG goes from 20M to 24M, below 25M. (An invoice of 10M would take LG to 30M and stop.)	Pass
Gate 3	Bank A: any debtor at most 15% of a 200M funded pool = 30M. LG holds 28M: 28M + 4M = 32M. Pay 2M from Bank A and 2M from Bank B, or all from Bank B or own funds.	Bank A blocked

Reverse factoring example

Our client is the **buyer, LG**. LG's suppliers sell us the invoices LG owes them, and LG pays us at maturity. LG's agreement: limit **100M**, no supplier above **40%** (= 40M). Today: ABC 30M, XYZ 15M, GHI 5M, total **50M**. ABC sends a new invoice of **15M**.

Gate 1	50M + 15M = 65M, below 100M.	Pass
Gate 2	ABC goes from 30M to 45M, above 40M. We finance **10M** now; the other 5M needs a management exception.	10M of 15M
Gate 3	LG is the debtor, so Bank A's debtor rule applies: cap 30M, LG holds 28M. Pay 2M from Bank A (LG reaches exactly 30M) and 8M from Bank B.	Split

THE DIFFERENCE In classic factoring the debtors change, so we cap each debtor inside the client's agreement. In reverse factoring the debtor is always the buyer, so we watch the buyer's total and cap each supplier. Bank rules see the buyer on every reverse-factoring drawing, so one large buyer can use up a bank's room quickly.

5 Step 1: Bank Limits screen

Bank Limits shows every bank's money on one page, and it is where all limits and rules are maintained.

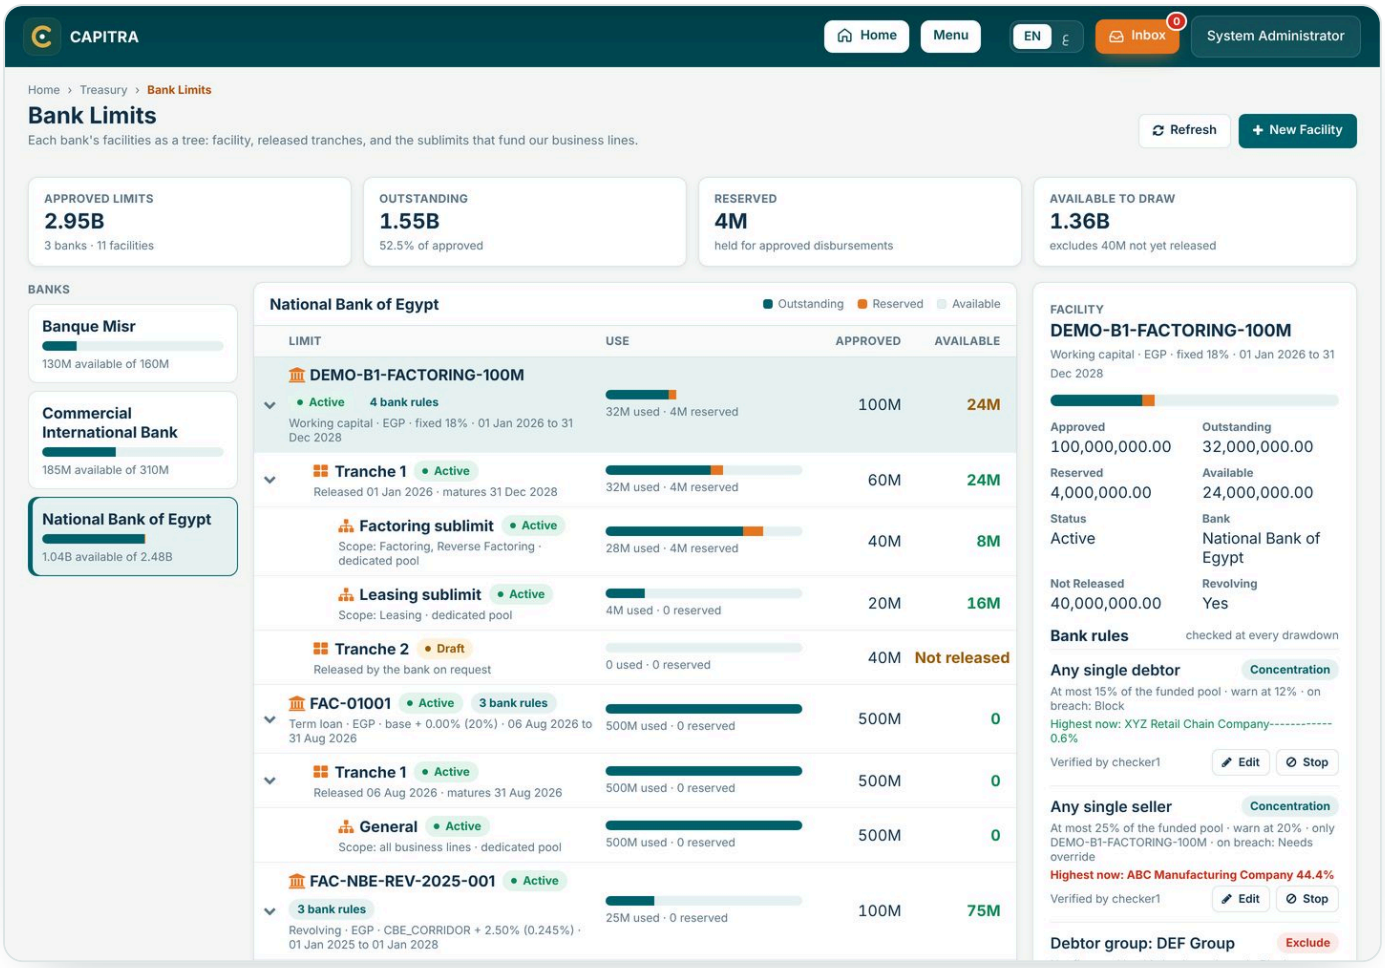


Figure 3. Top cards, banks list (left), tree (middle) and side panel (right).

- **Top cards**: approved limits, outstanding, reserved and available to draw for all banks. The last card also shows what is not yet released.
- **Banks list**: one card per bank with its usage bar. Click a bank to open its tree.
- **Tree**: facility → tranche → sublimit, each with its bar, approved and available amount. Available in **green** is the row's own free amount; in **orange**, a level above is the tighter limit.
- **Side panel**: details of the selected row, the bank's rules (when a facility is selected), and the action buttons.

— Tasks

TO DO THIS	DO THIS	CAPITRA CHECKS
Add a facility	**New Facility**, then the bank, reference, type, limit, currency, rate and dates	Unique reference; maturity after start
Add a tranche	Select the facility → **+ Tranche**	Tranches together ≤ facility limit
Release a tranche	Select the tranche → **Edit** → Status **Active**, enter the release date	A release date is required
Add a sublimit	Select the tranche → **+ Sublimit**, tick its business lines	Dedicated sublimits ≤ tranche
Change a limit	Select the row → **Edit**	Not below what is used or reserved
Add a bank rule	Select the facility → **+ Rule**	Values fit the type; warning below limit
Verify a rule	Second user: **Verify** on the rule	Not the user who made the change
End a rule	**Stop**, then give the reason	A reason is required

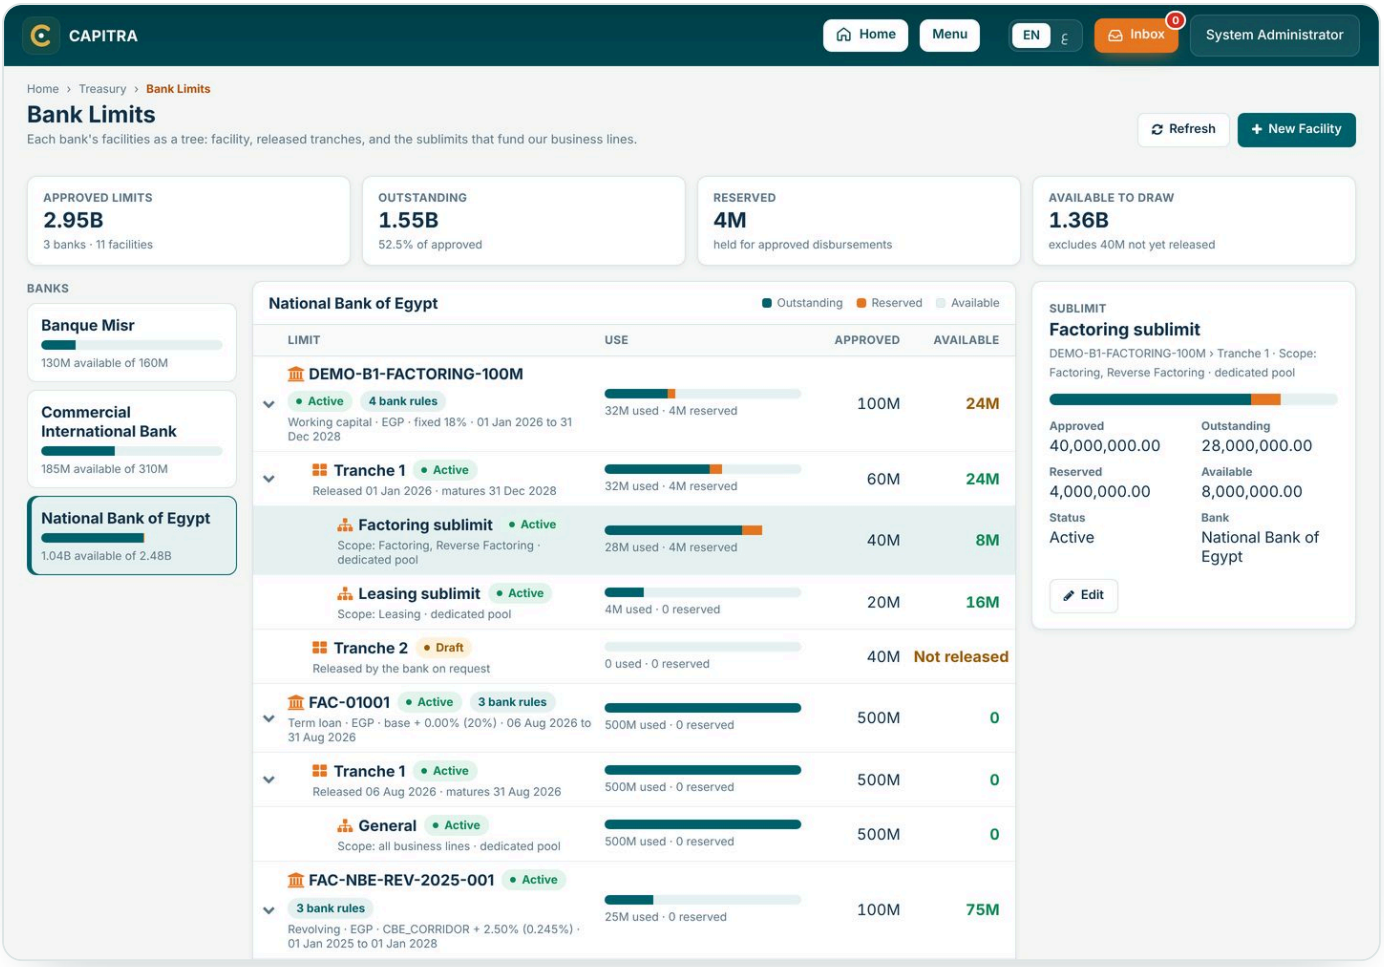


Figure 4. A sublimit selected: amounts, scope and actions.

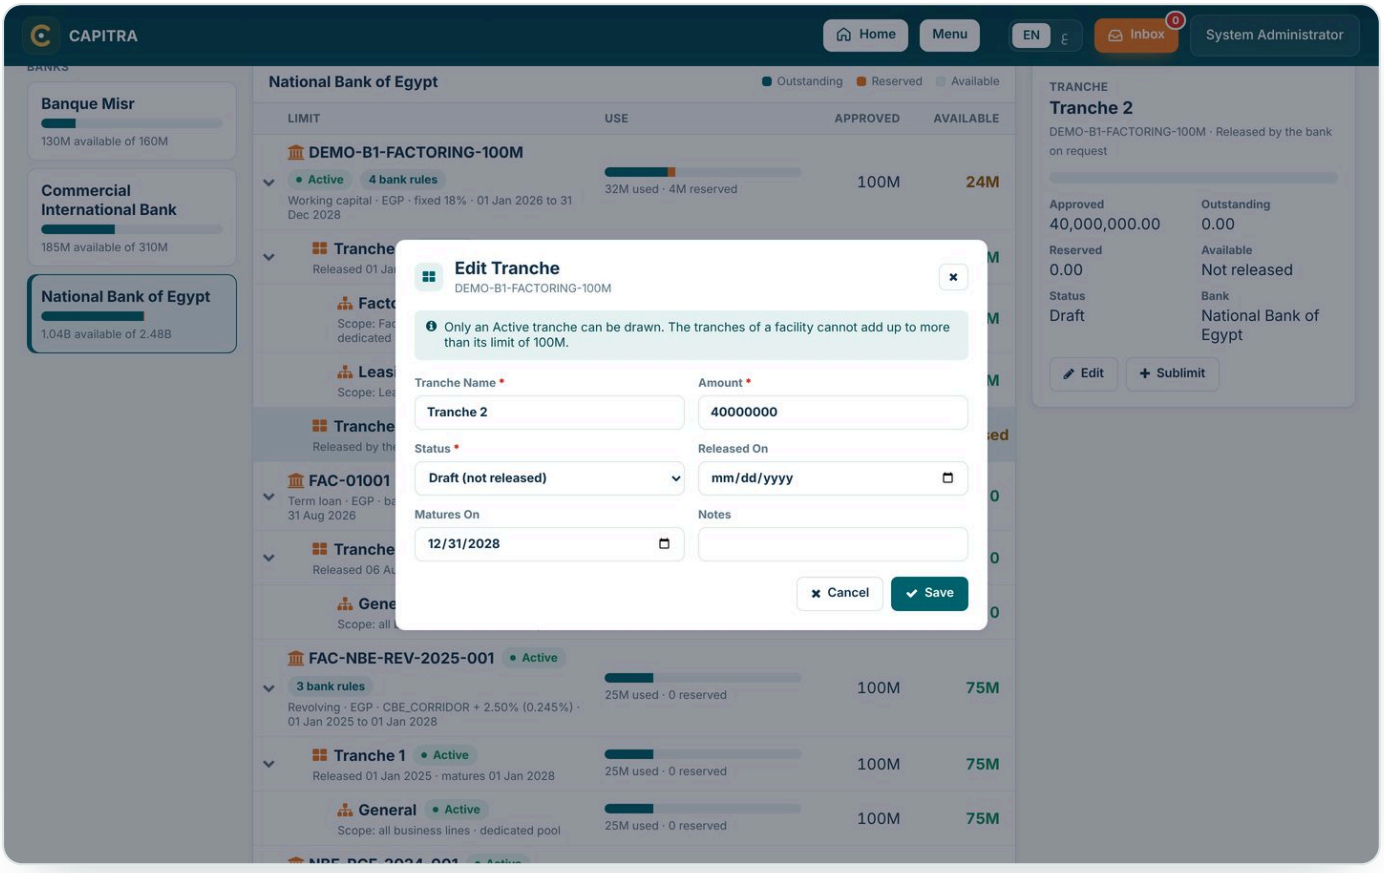


Figure 5. Edit tranche: set Active and the release date to release it.

EXISTING FACILITIES When Treasury was installed, every open facility received **Tranche 1** (its whole limit, Active) and a **General** sublimit (all business lines), with its balance carried in. Reshape them to match the term sheet, for example reduce Tranche 1 to 60M and add a 40M Draft Tranche 2.

6 Step 2: Treasury Disburse

Treasury Disburse is the last step of a disbursement. Treasury chooses which money pays the net amount, and Capitra checks each choice against the limits and bank rules before anything is paid.

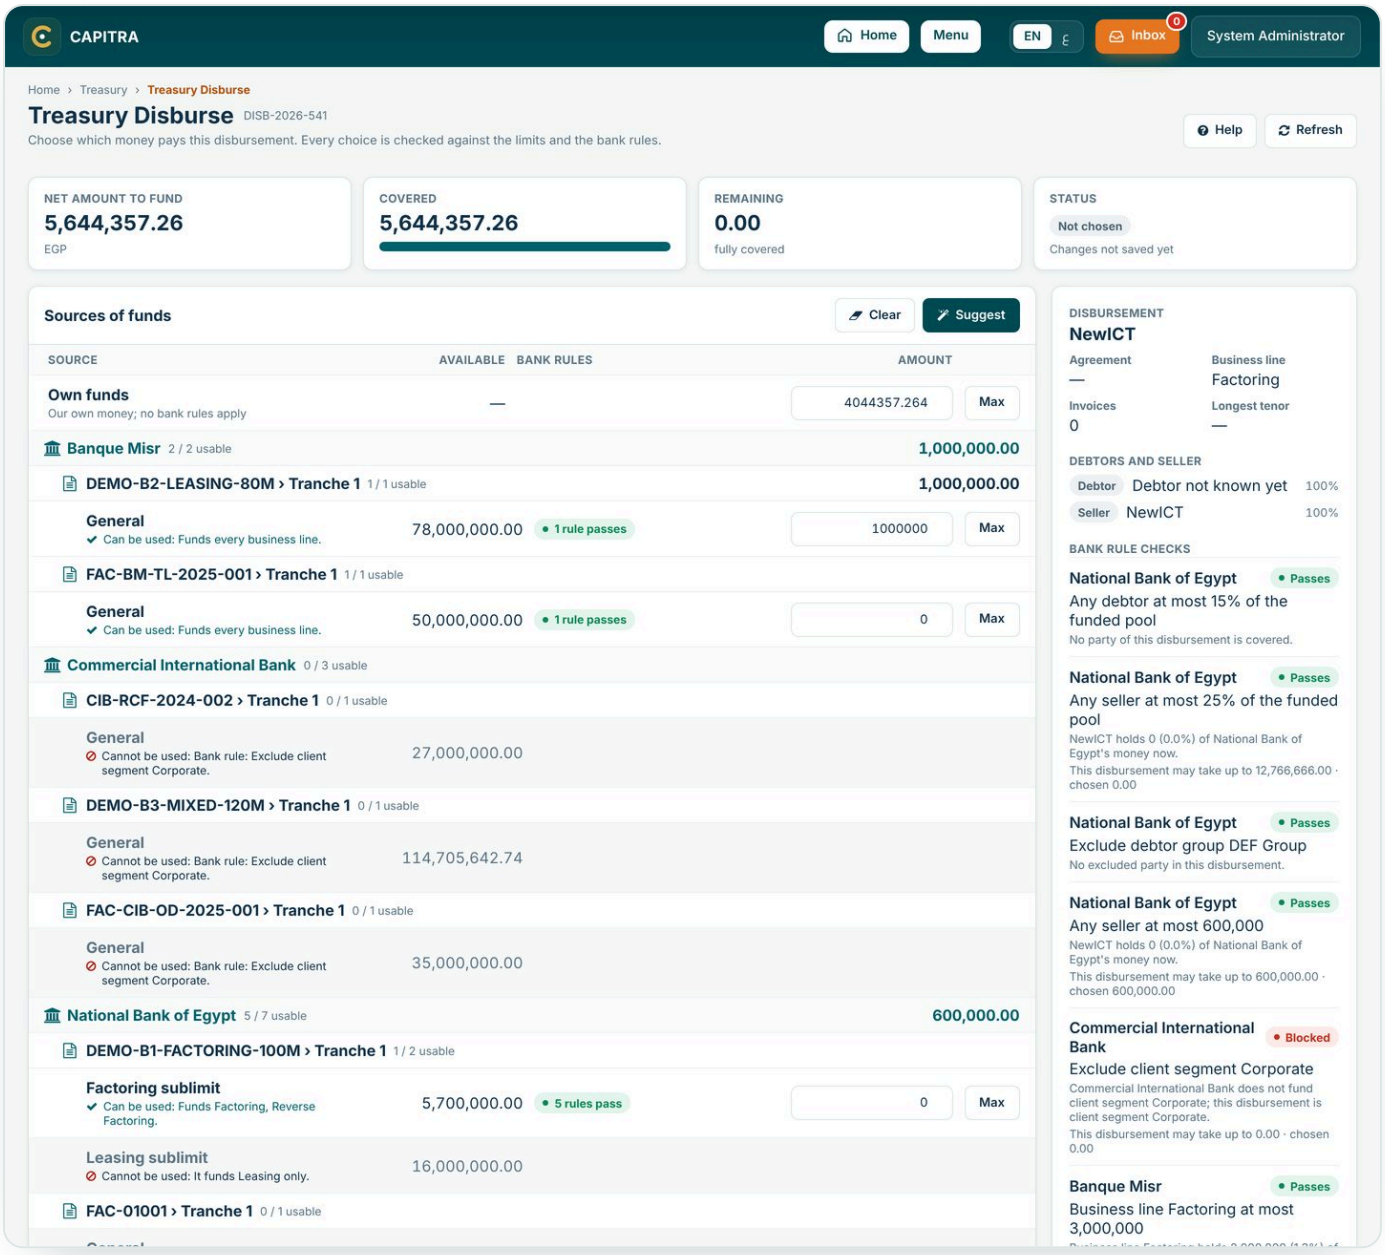


Figure 6. The limits as a tree: bank › facility › tranche › sublimit. Each sublimit says whether it can be used and why. The rule checks are on the right.

What the screen shows

- **Header**: the disbursement, the client, the debtor (or the buyer in reverse factoring), the business line and the **net amount to fund**.

- **Factoring or reverse factoring**: the page follows the deal's product. In factoring it lists the **Debtors** (who owe the invoices) and the **Seller** (our client). In reverse factoring it lists the **Buyer (debtor)**, who is our client and pays us at maturity, and the **Suppliers**, who sold the invoices and are paid now. The bank rule checks use the same words.
- **Limits tree**: **Own funds** first, then each bank → facility → tranche → sublimit in the disbursement's currency. Each bank and facility shows how many of its sublimits can be used, and the total you chose under it.
- **Each sublimit** says why in one line: ✓ Can be used with what it funds, or ⊘ Cannot be used with the reason. A sublimit that cannot be used is grey and has no amount box.
- **A usable line**: available amount, an amount box, a **Max** button and a live badge for each bank rule that applies.
- **Checks and total**: covered against net, and any line that is blocked or needs an override.

Who is paid: the party popup

Click any name under **Buyer and suppliers** (or **Debtors and seller**) to open its details. In reverse factoring this is how you check each supplier before Execute.

- **Amount to receive**: the supplier's share of the net amount, and the bank account it will be paid into. An orange box means the supplier has no verified bank account that can be paid yet: add and verify one in Customer 360 first.
- **Bills to be paid**: the supplier's invoices in this disbursement, with invoice date, due date, invoice amount and amount financed. Not-eligible invoices are grey with their reason, and are not paid.
- **Bank accounts**: every account of the supplier. Can be paid means verified and the waiting days have passed.

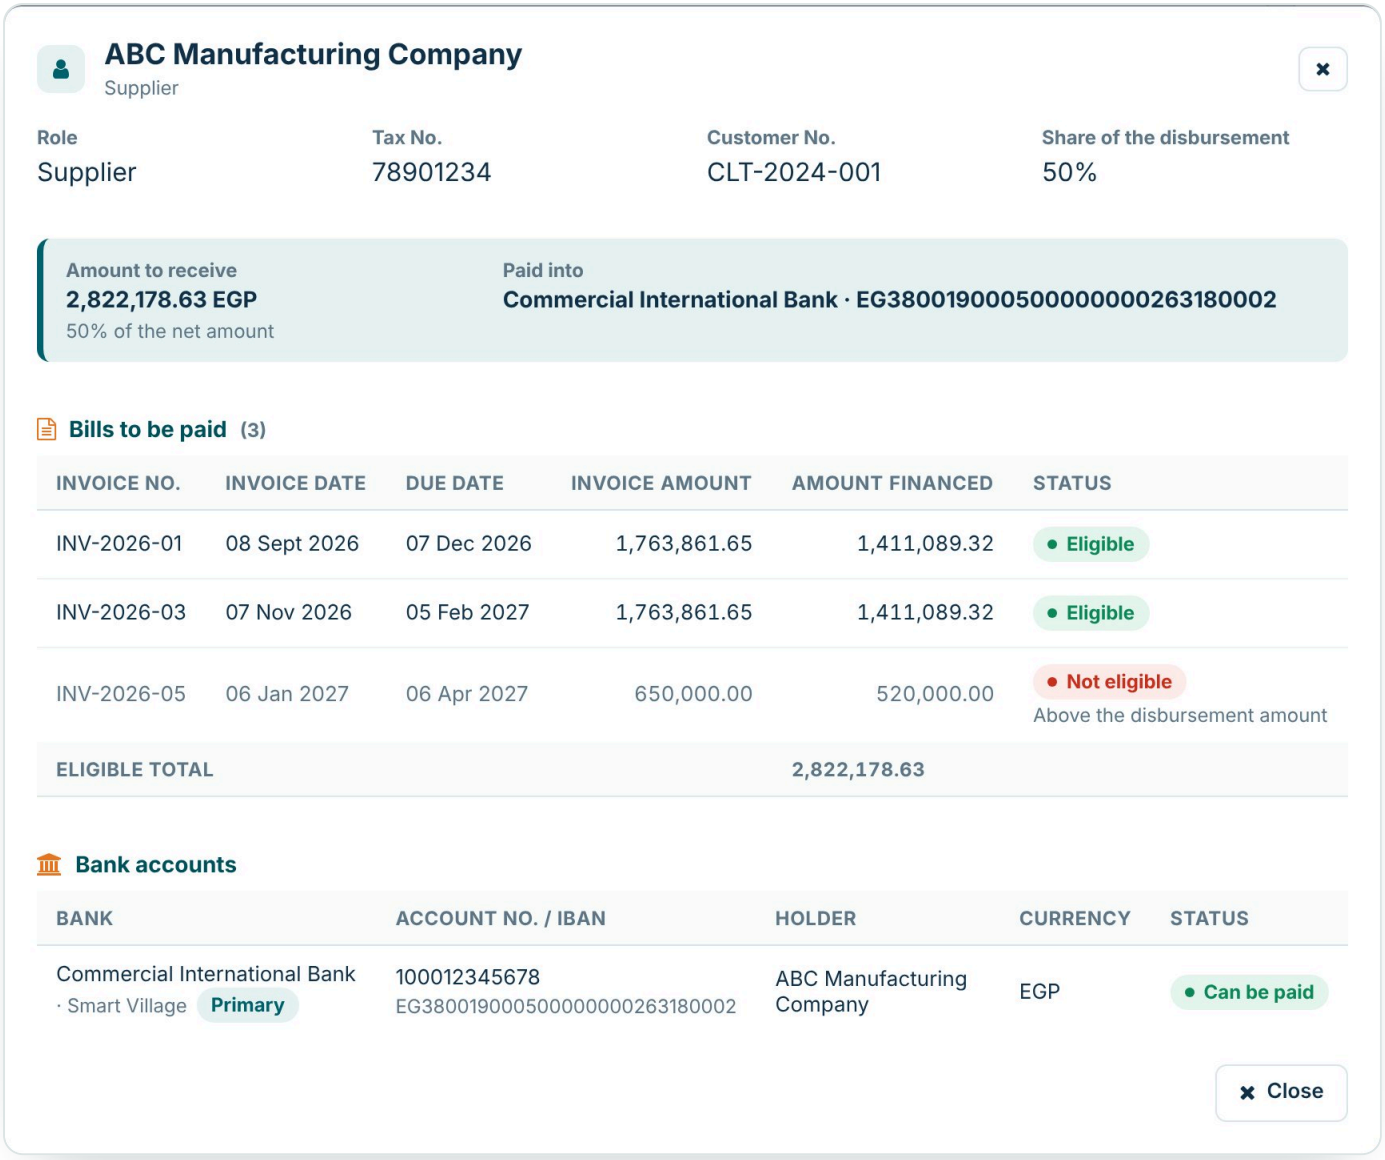


Figure 6b. A supplier in reverse factoring: what it receives, where it is paid, and the bills behind it.

Invoice summary

Press **Invoice summary** at the top of Treasury Disburse, the Disbursement Request or Invoice Upload. It shows, read only:

- **Four boxes**: invoices received, minus not eligible, equals eligible, and the **value we finance** after the advance rate (for example 88% of the eligible amount). The disbursement net amount is shown under them, with any difference.
- **Eligible bills by supplier** (by debtor in factoring): one line per supplier with its number of bills and totals; click it to show or hide its bills. The last line is the total eligible.
- **Not eligible**: each invoice left out, with its reason and the total.

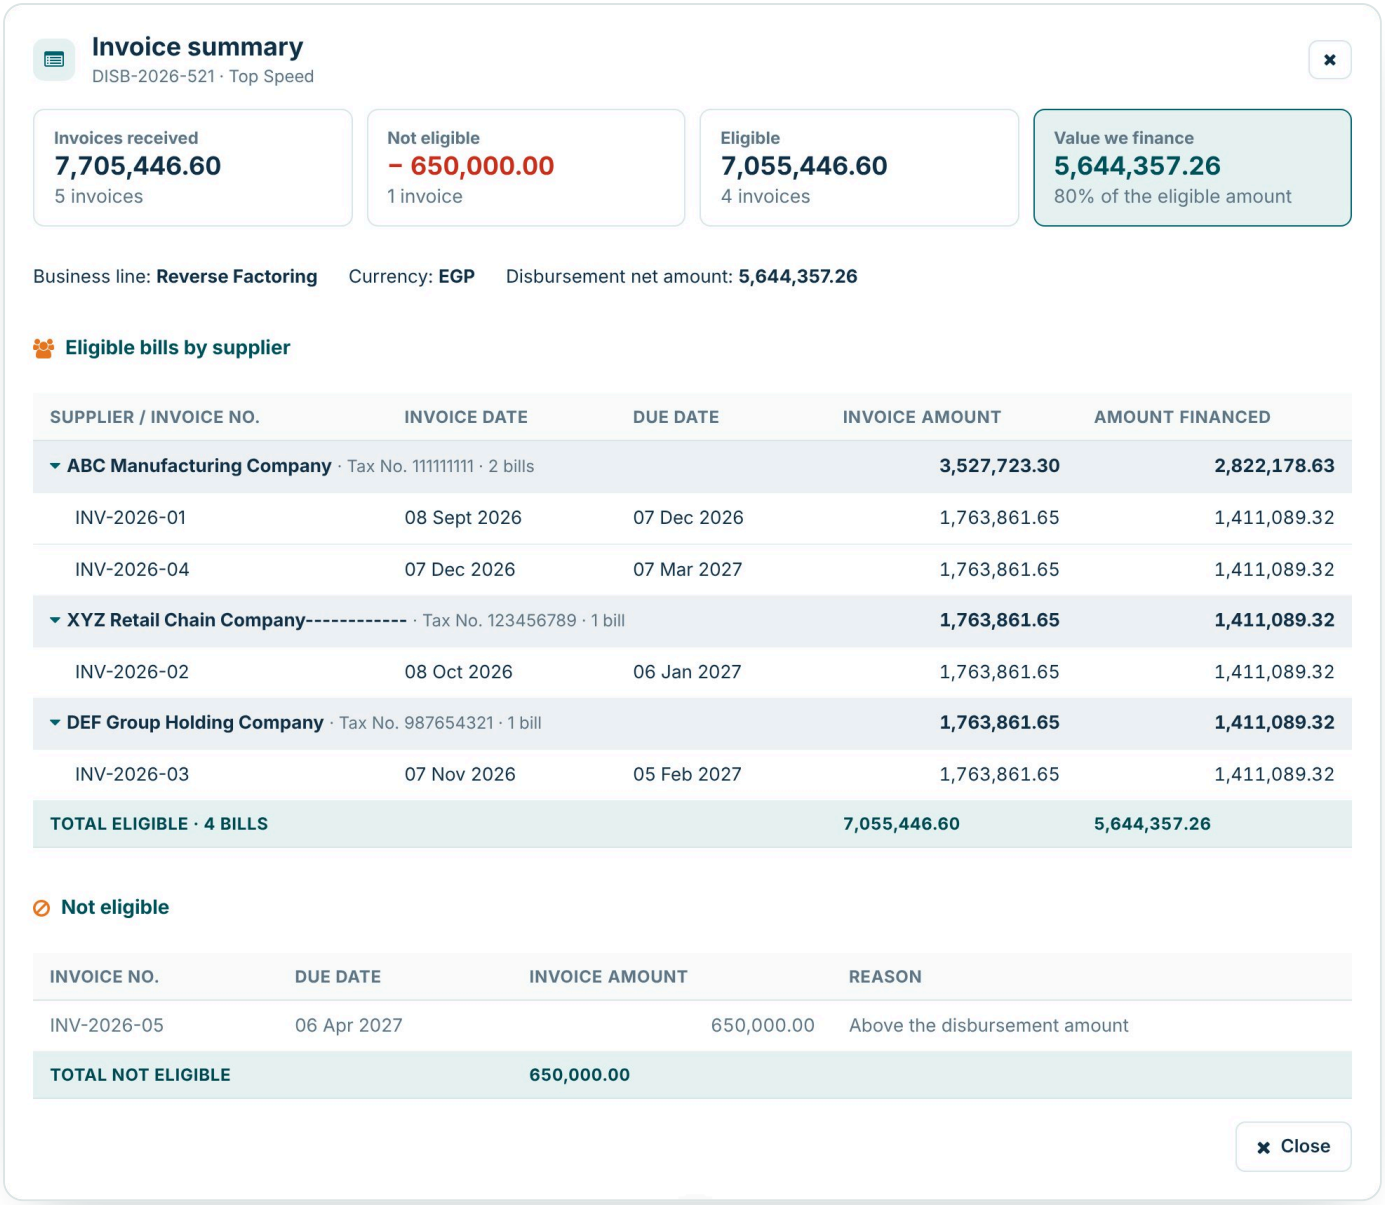


Figure 6c. Invoice summary: from invoices received to the value we finance, then the eligible bills by supplier.

Completed steps, view only

In the Factoring Customer Workspace, the **Disbursements** tab shows the open step and, under it, a button for each **completed step** (Initiation, Invoice Upload, Treasury Disburse). The button opens that step's page in **view-only** mode: a teal strip says so, every field is locked and the step's buttons are hidden.

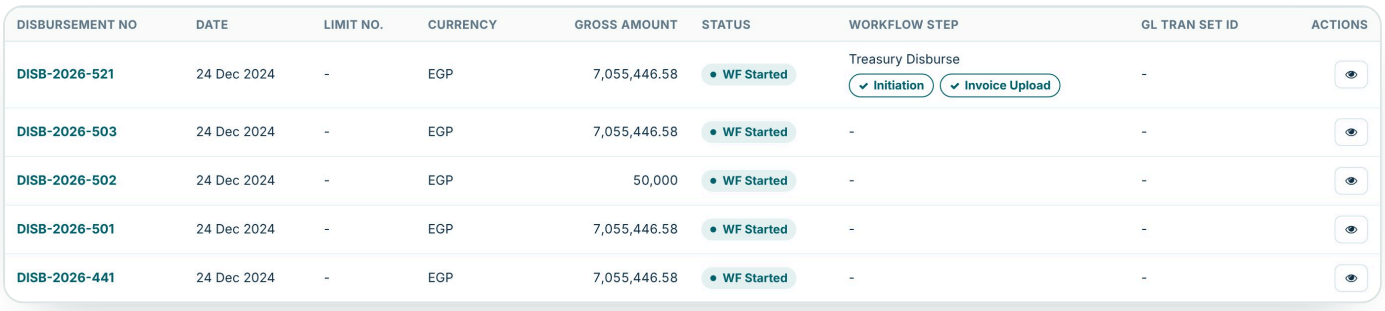


Figure 6d. The completed steps of each disbursement; each one opens view only.

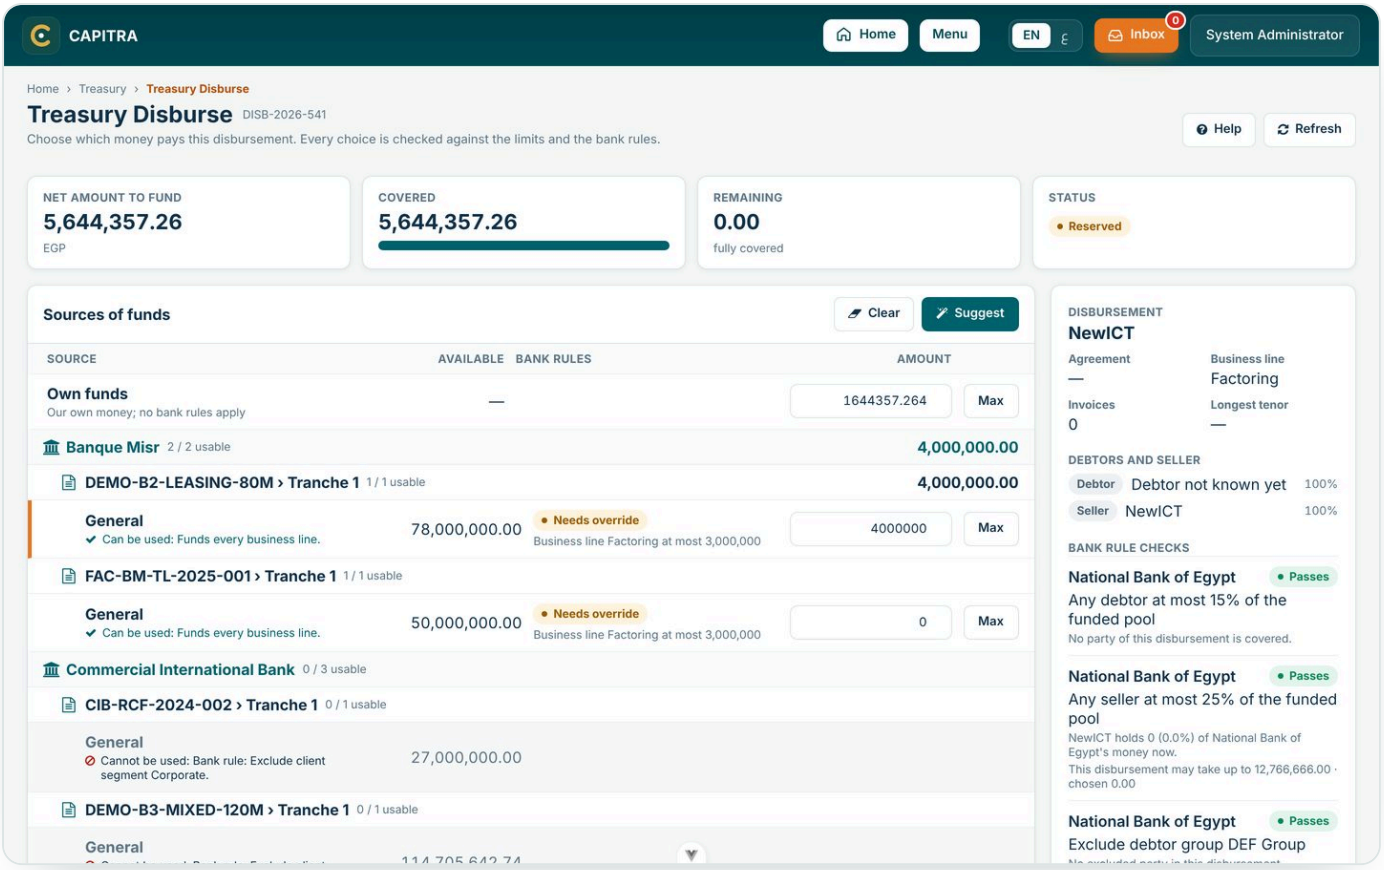


Figure 7. A line above an override rule turns orange. Enter the reason and press Save and reserve.

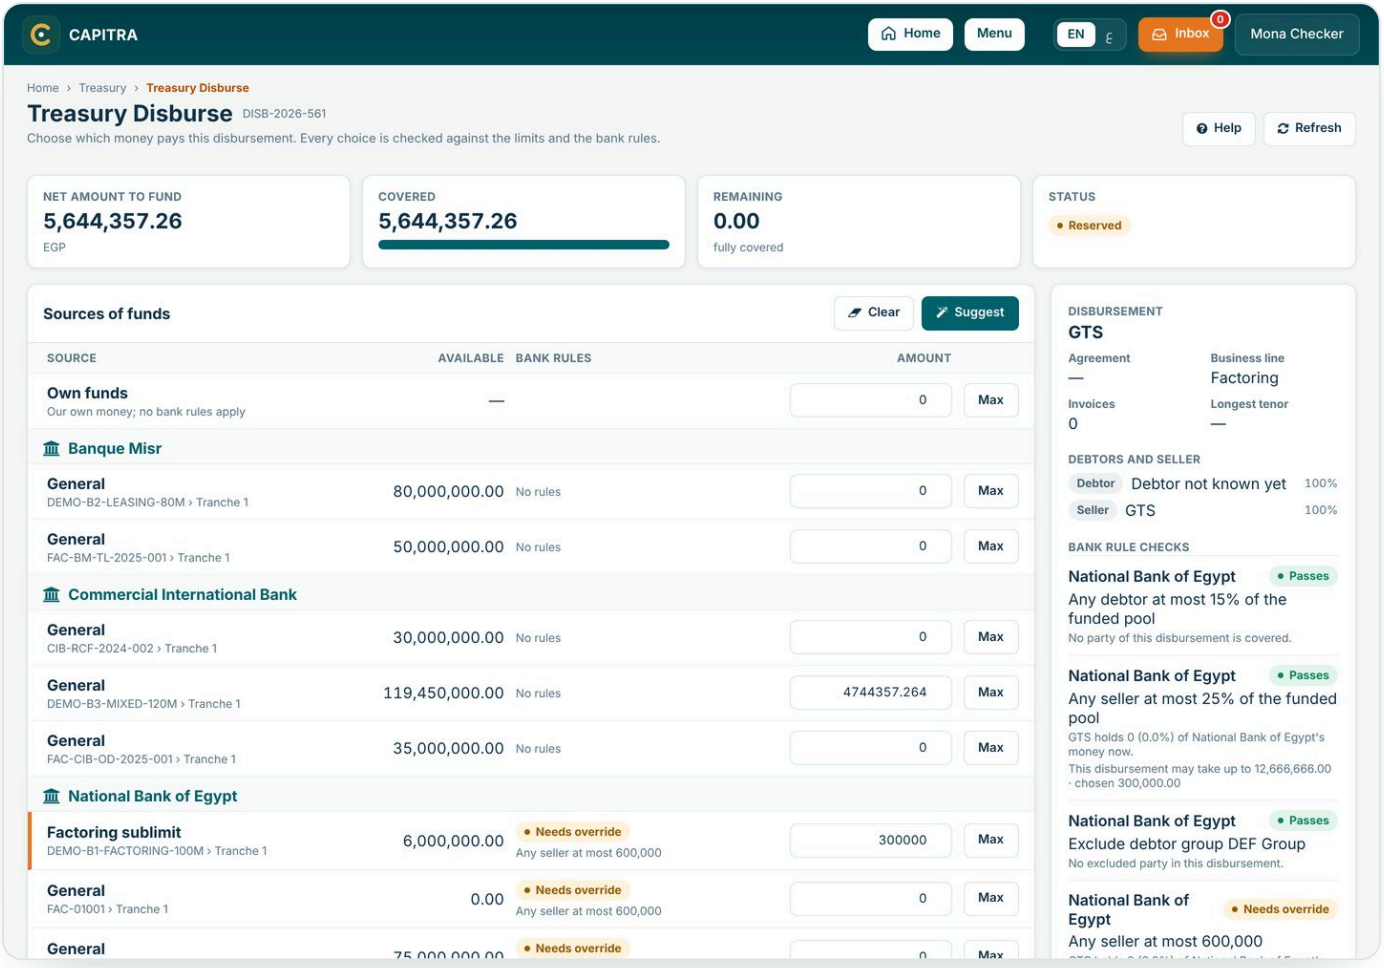


Figure 8. A second user with TRS.VERIFY opens the same page and presses Approve override.

Worked example

Disbursement for ABC, debtor LG, business line Factoring, net **12M**.

SOURCE	AVAILABLE	BANK RULE RESULT	AMOUNT
Own funds	6M	No bank rules	0
Bank A › Tranche 1 › Factoring	8M	LG holds 28M of a 30M cap: up to about 2.3M passes (the pool grows with the drawing) more blocked	**2M**
Bank B › Tranche 1 › Factoring	18M	LG at 6% of a 20% cap pass	**10M**
Total			**12M = net ✓**

Bank A's Leasing sublimit is shown in grey: *Cannot be used: It funds Leasing only.*

Why a sublimit cannot be used

REASON ON THE LINE	WHAT TO DO
The facility is suspended (or under renewal, expired ...)	Use another facility, or make the facility Active in Bank Limits.
The bank has not released this tranche yet	When the bank's letter arrives, make the tranche Active with its release date.
The sublimit is suspended	Use another sublimit, or make it Active again.
It funds Leasing only (or other business lines)	The sublimit is for another business line. Use one that funds this one.
Nothing is left to draw	The sublimit, tranche or facility is fully used or reserved.
Bank rule: Exclude ...	The bank does not fund this debtor, group, business line, product or client segment. Use another bank or own funds.

The step guide

Under the top cards, the **step guide** lists the steps of this page in order, ticks the ones done and highlights the current one. **What to do now** says the next action in one sentence, with a button for it (Suggest, Save and reserve, Execute, Go to the transfers). When something blocks the way, such as a red bank rule, an override waiting for a second user, or a supplier without a verified bank account, it turns orange and says what to fix.




Figure 6e. The step guide in reverse factoring: executed, two suppliers left to confirm.

How to fund a disbursement

1. Open the disbursement at its Treasury Disburse step from the inbox.
2. Press **Suggest** to fill the lines within every rule, or type amounts. **Max** fills a line with the most it allows. Suggest fills the bank lines first (most available first) and puts the rest on own funds; when Module Settings says **Own funds first**, it puts the whole amount on own funds.
3. Read the line under each sublimit: ✓ can be used, ⊘ cannot be used and why. Then watch the badges: green passes, orange warns, red blocks. A line that needs an override shows who must approve it.
4. When the total equals the net amount and nothing is red, **Execute** becomes active.
5. **Execute** records a drawdown on each chosen sublimit with the debtor and seller, so Bank Limits and "Highest now" update at once. In the same moment it pays the client and posts the GL (see below). Then **Complete** the step.

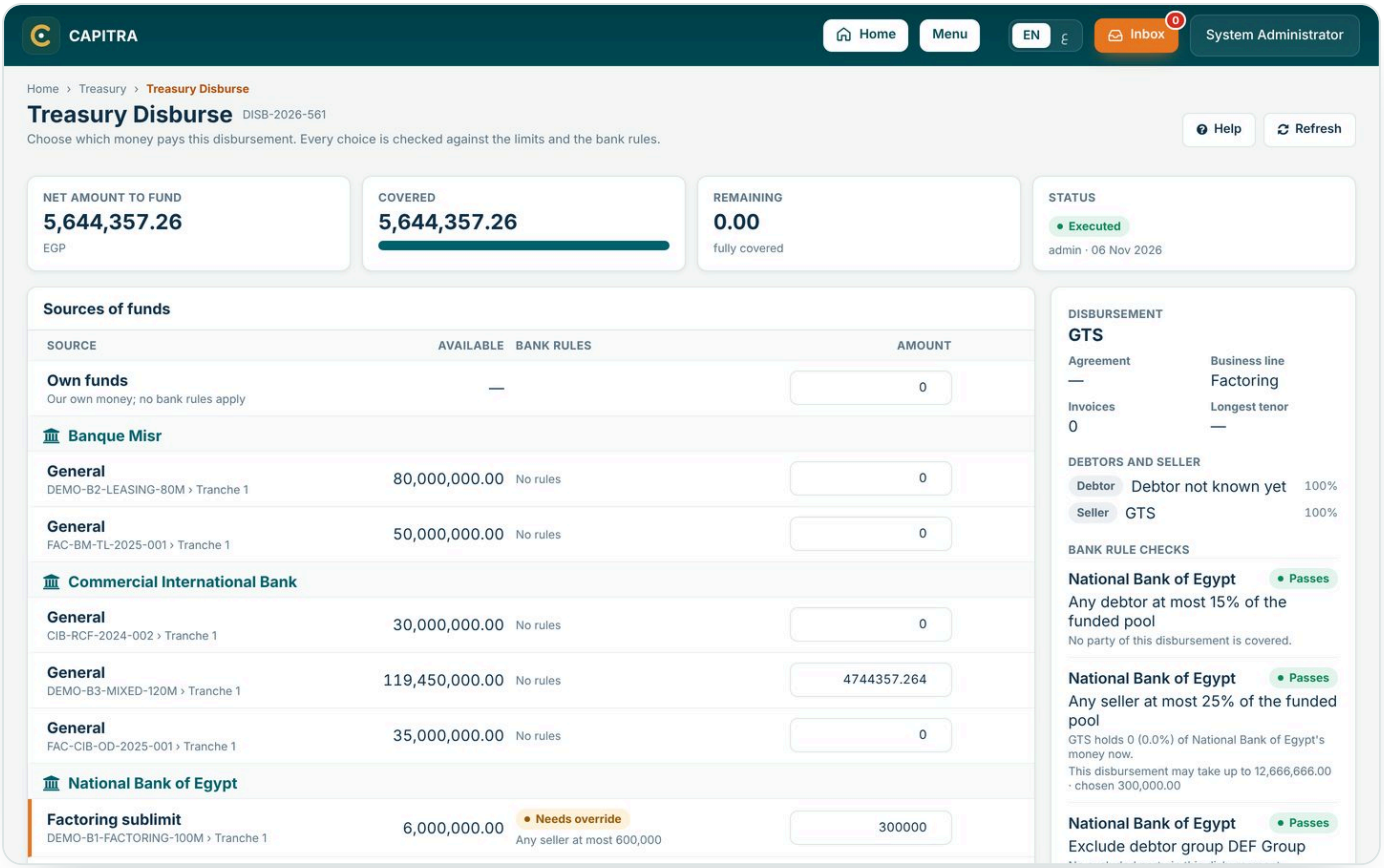


Figure 9. Executed: who executed it and when. The choice can no longer be changed.

Payment and GL on Execute

Execute does everything at once, or nothing. Each bank puts its money in **our account at that bank**, and the client is paid from there. Own funds are paid from the main operating account. The **Payment** panel shows the account for each line before you press Execute.

> **ESCROW** An escrow account pays only when we have no other account at that bank. Module Settings → Treasury → **Escrow accounts may pay** set to No stops escrow accounts paying at all; the Payment panel then asks for another account.

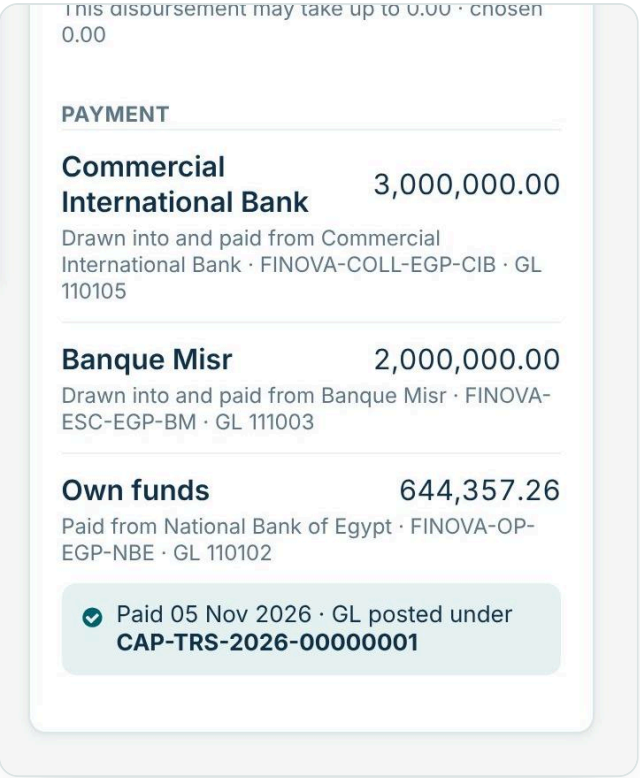


Figure 10. The Payment panel: the account that pays each line and its GL account; after Execute, the date and the GL transaction set.

For the 12M example above (Bank A 2M, Bank B 10M) the GL entries, under one number CAP-TRS-..., are:

JOURNAL	ACCOUNT	DEBIT	CREDIT
1 · Bank drawdown	Bank A account	2M	
	Bank B account	10M	
	220101 Bank Facilities - Short Term		12M
2 · Payment to the client	120101 Factoring Receivable - Principal	12M	
	Bank A account		2M
	Bank B account		10M

- Own funds appear only in journal 2: we pay from our own account, with no bank borrowing.
- The invoices become **FUNDED** with their funded amount and date, and the disbursement becomes **DISBURSED**.

- The accounts come from the rule the **Treasury Disburse** workflow step names (Workflow designer › the step › Product Event Rule, normally **TRS_DISBURSE**). When the step names none, the rule linked to the action in Admin Setup › Product Catalog › TREASURY_FUNDING is used. If no rule is found, or the GL refuses (for example a closed period), Execute shows the reason and saves nothing.

Reverse factoring: supplier transfers

In reverse factoring we pay the **suppliers**, not the buyer, and each supplier may bank somewhere else. So the money moves in stages, with GL accounts kept apart from factoring, and the whole GL posts once, under **one Tran Set ID**:

1. Before Execute the table shows the **Planned** transfers. A supplier without a verified bank account in Customer 360 shows in red, and Execute stays blocked until each one has an account.
2. **Execute** saves one transfer per supplier with its bank, IBAN and amount, as **Sent**. Nothing posts to the GL yet. The **Confirmed** boxes appear now.
3. When the bank confirms a transfer, tick its box and press **Confirm** (a bank reference is optional). The box in the header ticks every supplier at once.
4. When the **last** supplier is confirmed, the GL posts under one Tran Set ID: journal 1 the bank drawdown (rule **TRS_RF_DRAWDOWN**: DR our bank account / CR reverse factoring bank borrowings), then one journal per supplier (rule **TRS_RF_TRANSFER**: DR reverse factoring receivable / CR our bank account), named after the supplier. If the GL refuses, nothing is confirmed.
5. **Complete** works only when every supplier is confirmed. To complete now, tick all of them.


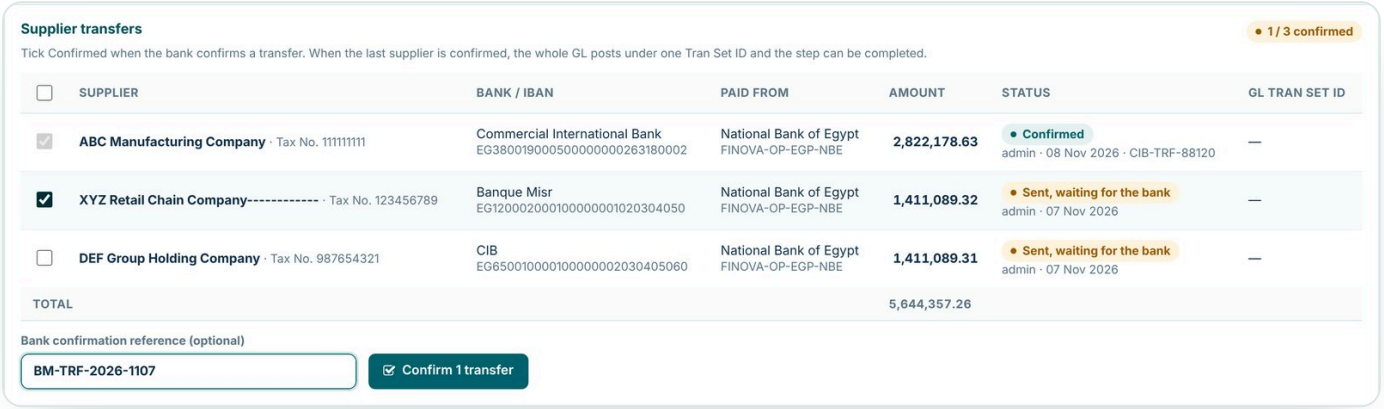


Figure 10b. Supplier transfers after Execute: one confirmed, one ticked and ready to confirm, one still waiting for the bank.

GL to be posted

Below the sources, **GL to be posted** lists every line the step will post, from the saved sources: journal, account, description, debit and credit, with the totals. It shows for factoring (posted at

Execute) and for reverse factoring (posted at the last confirmation). Once posted, the title becomes **GL posted** and shows the Tran Set ID. If a rule is missing or a bank account has no GL account code, it says so here before you press anything.

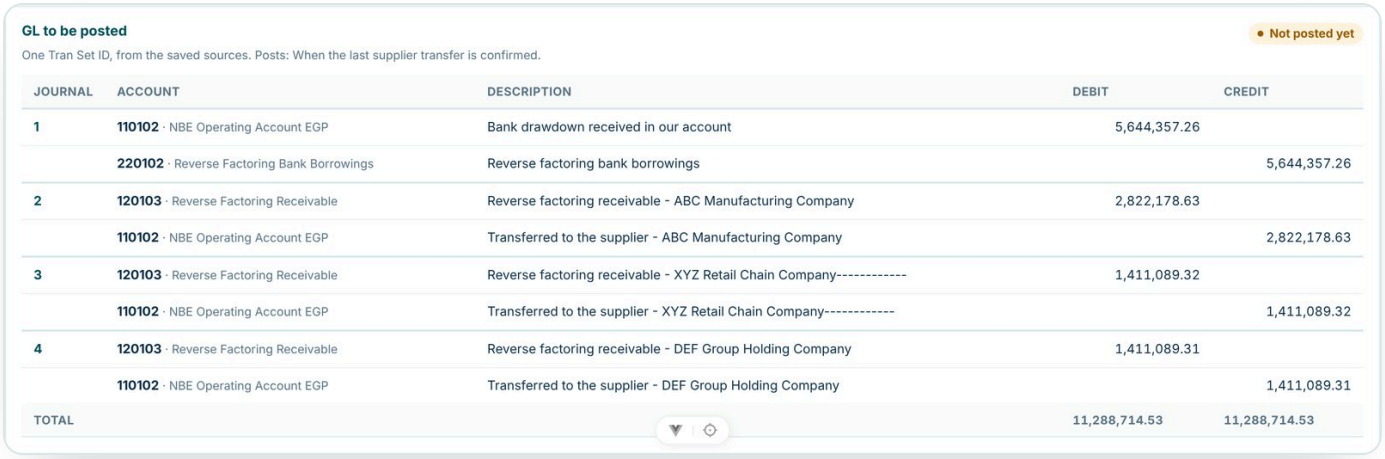

GL to be posted


Not posted yet

One Tran Set ID, from the saved sources. Posts: When the last supplier transfer is confirmed.

JOURNAL	ACCOUNT	DESCRIPTION	DEBIT	CREDIT
1	110102 · NBE Operating Account EGP	Bank drawdown received in our account	5,644,357.26	
	220102 · Reverse Factoring Bank Borrowings	Reverse factoring bank borrowings		5,644,357.26
2	120103 · Reverse Factoring Receivable	Reverse factoring receivable - ABC Manufacturing Company	2,822,178.63	
	110102 · NBE Operating Account EGP	Transferred to the supplier - ABC Manufacturing Company		2,822,178.63
3	120103 · Reverse Factoring Receivable	Reverse factoring receivable - XYZ Retail Chain Company----------	1,411,089.32	
	110102 · NBE Operating Account EGP	Transferred to the supplier - XYZ Retail Chain Company----------		1,411,089.32
4	120103 · Reverse Factoring Receivable	Reverse factoring receivable - DEF Group Holding Company	1,411,089.31	
	110102 · NBE Operating Account EGP	Transferred to the supplier - DEF Group Holding Company		1,411,089.31
TOTAL			11,288,714.53	11,288,714.53

Figure 10d. GL to be posted for a reverse factoring disbursement: the drawdown, then one journal per supplier, all under one Tran Set ID.

GL TRAN SET ID Every completed step shows the GL transaction sets it posted: on its button in the customer's Disbursements tab, and at the top of its view-only page. For reverse factoring, Treasury Disburse shows its single Tran Set ID.



DISB-2026-521 | 24 Dec 2024 | - | EGP | 7,055,446.58 | WF Started | Workflow completed: Initiation, Invoice Upload, Treasury Disburse (GL CAP-TRS-2026-00000041, CAP-TRS-2026-00000042) | -

Figure 10c. The Treasury Disburse step with the GL transaction sets it posted.

Rules to remember

- One disbursement may be split across several sources.
- A line can never take more than its available amount, which already respects the tranche and facility above it.
- Money chosen but not executed shows as **reserved** (orange), so two people cannot use the same room.
- Gates 1 and 2 were checked before this step. Only bank rules (gate 3) are checked here.

7 Messages and what to do

Capitra shows these messages in a pop-up when a save is refused.

MESSAGE	WHAT IT MEANS AND WHAT TO DO
The tranches would add up to ..., above the facility limit	The new tranche is too large. Reduce it, or raise the facility limit first.
The tranches already add up to ...; the limit cannot be lower	Reduce or close a tranche before lowering the facility.
Enter the date the bank released the tranche	An Active tranche needs its release date from the bank's letter.
The tranche has money drawn or reserved; it must stay Active	Wait until it is repaid, or move the usage, before making it Draft or Closed.
The dedicated sublimits would add up to ..., above the tranche	Make this sublimit smaller, make it a shared cap, or enlarge the tranche.
A sublimit cannot be above its tranche	Even a shared cap cannot exceed the tranche it sits in.
The sublimit has money drawn or reserved; it cannot be closed	Suspend it instead to stop new drawings.
Enter the limit as a percent or as an amount	A concentration rule needs one of the two.
The warning must be above 0 and below the limit	For a 15% limit, a warning of 12% is valid; 15% or more is not.
You made the last change; another user must verify it	Ask a colleague with TRS.VERIFY to verify the rule.
Enter why the rule no longer applies	Stopping a rule needs a reason, kept in history.
Another facility has this reference	Facility references are unique. Check for a duplicate entry.
Choose what is excluded / Choose which one the limit is for	A business line, product or client segment rule needs the one it is for.
... cannot fund this disbursement. (reason)	The sublimit cannot be used, for the reason given. Choose another source.

8 Permissions, statuses and glossary

Permissions

Admin Setup → Roles

PERMISSION	ALLOWS
`TRS.VIEW`	Open Bank Limits and see the tree and rules
`TRS.EDIT`	Add and change facilities, tranches, sublimits and rules; stop a rule
`TRS.VERIFY`	Verify a rule entered by another user

Statuses

ITEM	STATUSES
Facility	Term sheet · Active · Suspended · Under renewal · Expired · Closed. Only Active can be drawn.
Tranche	Draft (not released) · Active (released) · Closed
Sublimit	Active · Suspended · Closed
Bank rule	Waiting for verification · Active (checked) · Stopped

Glossary

TERM	MEANING
Available	What can still be drawn, after the limits above are respected
Debtor	The company that owes the invoice and pays it at maturity
Funded pool	What we have drawn from a bank (outstanding + reserved)
Outstanding	Drawn and not yet repaid
Reserved	Held for an approved disbursement that is not yet paid
Scope	The business lines a sublimit may fund
Seller / supplier	The company that sells the invoice: our client in classic factoring, the buyer's supplier in reverse factoring
Source of funds	Own funds or a bank sublimit chosen to pay a disbursement
Tenor	Days from the invoice date to its due date